

(19)



JAPANESE PATENT OFFICE

PATENT ABSTRACTS OF JAPAN

(11) Publication number: **09051493 A**

(43) Date of publication of application: 18 . 02 . 97

(51) Int. Cl.

H04N 5/66

(21) Application number: 07200884

(71) Applicant: **FUJITSU GENERAL LTD**

(22) Date of filing: 07 . 08 . 95


(72) Inventor: **YABE YOSHIRO**(54) **PLASMA DISPLAY DEVICE**

(57) Abstract

PROBLEM TO BE SOLVED: To establish the configuration method for the plasma display device in which there is no danger of infiltration of water drops or the like when an optical filter is cleaned.

SOLUTION: An optical filter 1 is fitted to a display window 2a made open to a front frame 2 of a case and a video image of a PDP 3 arranged behind it is displayed. A rubber packing 4 is arranged between the optical filter 1 and the surrounding of the display window 2a of the front frame 2 of the case of the optical filter 1. One side face 4a of the rubber packing is adhered to the front frame 2 by a double-side tape or the like. Similarly the structure of the rubber packing 4 is selected as a seamless structure whose size is slightly larger than the display window 2a of the front frame 2, that is, slightly smaller than the outer ridge of the optical filter 1.

COPYRIGHT: (C)1997.JPO

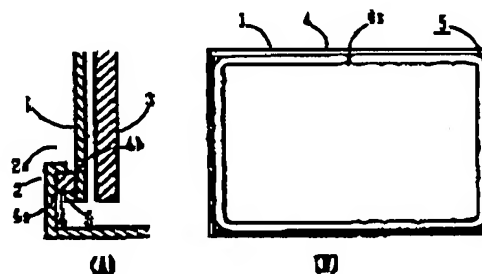

BEST AVAILABLE COPY